


GPS LOCKBOX™

ACC-CBDTC-KYE48X0-4

Phone & Battery Combo Charger

for Kyocera E4830/E4810

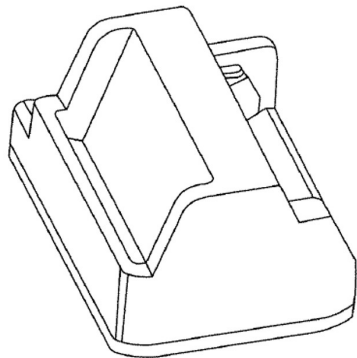

User Manual

Caution:

- Indoor use only.
- Use only approved USB Type-C chargers.
- Do not disassemble.
- Do not use in direct sunlight or in places with high humidity, or when the battery charger or battery is wet.
- Unplug when not in use.
- Use only with Kyocera phone and approved batteries
- Use only with phone listed as compatible with the E4830/E4810 phone charger.

Warning:

- To prevent fire or shock hazard, do not expose the unit to rain or moisture.

Specification:


Supported Battery Chemistry: Li-Ion & Li-Poly
Input Power: 5V/3A (or 5V/0.5A from PC)
Output: 4.2V/0.85A per Single Battery Desktop Charger
5V/2A per Single Phone Desktop Cradle
Operation Temperature: Between 32°F and 95°F
Charging Time: 1.5 hours for 75% charge, 2 - 2.5 hours for full charge.*
Dimensions: 3-1/8" (width) x 4-1/4" (length) x 2-1/2" (high).

- * Charge times will vary. Based on 1700mAh battery using a 5V/2A USB Type-C charger

Operation

1. Connect an approved USB Type-C charger to the back of the Combo Charger. The red LED will light up when powered.

- * Inserting the USB Type-C connector incorrectly may damage the phone charger.

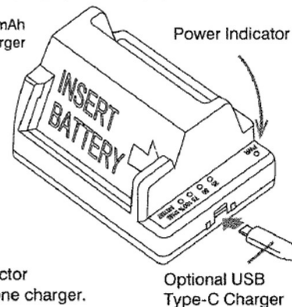


2. Insert phone into the Combo Charger with the phone angled toward the front of the charger.

3. **PHONE CHARGING:** The charger will automatically start charging the phone. **To verify the percentage of the battery charged, check the battery capacity indicator on the phone.**



4. **SPARE BATTERY CHARGING:** To charge a SPARE battery, align battery contacts and Combo Charger contacts as you angle and secure the battery into charging position. Charging will begin automatically and the Combo Charger LED's will indicate SPARE battery charging status:

! DO NOT INSERT SPARE BATTERY STRAIGHT DOWN INTO CHARGER, THE BATTERY TERMINAL CONTACTS CAN BE DAMAGED

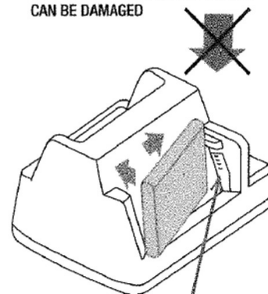


RED: Power Indication of Combo Charger
Green: 4 levels of SPARE battery charging status - flashes during charging, and stays on when each level of charging is completed.
Green LED #1: 0% ≤ 25%
Green LED #2: 25% ≤ 50%
Green LED #3: 50% ≤ 75%
Green LED #4: 75% ≤ 100%

Spare Battery Terminal Contact

Operation 5-Bay Charger

1. Connect the supplied AC Power Adapter to the back of the 5-bay Desktop Charging Dock. The green LED will light up indicating the Charging Dock is receiving power.

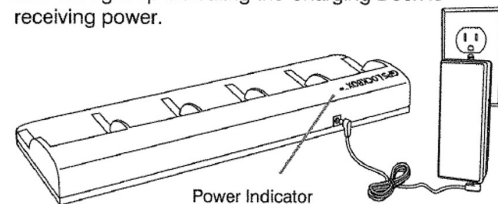

2. Slide the Combo Charger into the Dock until it clips into place. The red power LED will light up on the Combo Charger when connected and being powered. Follow the previous instructions on how to insert a phone or battery.

