




DESKTOP CHARGING CRADLE (ODT301) INSTRUCTION GUIDE

Thank you for purchasing this product.

Be sure to read this entire manual before use to ensure proper operation. Store this manual for future reference.

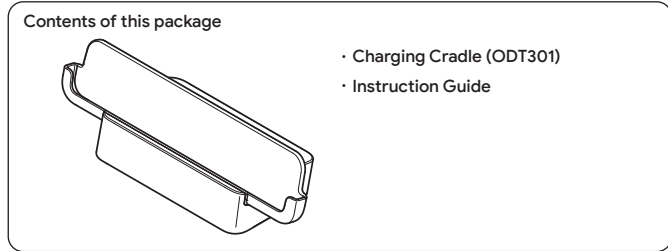

* AC adapter (SCP-54ADT) not included.
* This product is not waterproof, dustproof, or shockproof.

This product is intended for charging Kyocera's DuraSlate Wi-Fi Tablet KC-T304C.

When charging, always use the AC adapter (SCP-54ADT) included with the KC-T304C or as sold separately.

IMPORTANT: Make sure nothing is connected to the DuraSlate USB-C port before inserting the tablet into the Charging Cradle. The DuraSlate cannot be charged using the DC jack or charging contacts if anything is connected to the USB-C port.

Warranty

- KYOCERA provides one (1) year limited product warranty from the date of purchase for items purchased directly from Kyocera. This warranty is for the original purchaser only and is not transferrable. This warranty covers manufacturing defects and does not apply to the following: a) normal wear and tear; b) customer misuse; c) use in combination with products which are not authorized to be compatible; or d) use in unsafe conditions. Kyocera assumes no liability for any incidental, consequential or indirect damages under this limited warranty. KYOCERA shall, at its sole and absolute discretion, either replace or credit the purchase price of such products under warranty claim. Please contact us for any warranty claim or concern through <https://solutions.kyoceramobile.com/contactus>
- Batteries must be used in accordance with the handling instructions printed on the battery. Incorrect use of this product is dangerous as it may cause an accident resulting in injury or fire due to overheating, ignition or explosion of the battery.
- THE REMEDIES DESCRIBED ABOVE ARE YOUR SOLE AND EXCLUSIVE REMEDIES AND OUR ENTIRE LIABILITY FOR ANY BREACH OF THIS LIMITED WARRANTY. KYOCERA'S LIABILITY SHALL UNDER NO CIRCUMSTANCES EXCEED THE ACTUAL AMOUNT PAID BY YOU FOR THE WARRANTED PRODUCT, NOR SHALL KYOCERA UNDER ANY CIRCUMSTANCES BE LIABLE FOR ANY CONSEQUENTIAL, INCIDENTAL, SPECIAL OR PUNITIVE DAMAGES OR LOSSES, WHETHER DIRECT OR INDIRECT. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

Contact Us

- For repair or product inquiries, contact us at the following.


Kyocera International, Inc.

Learn more: <https://kyoceramobile.com>
Customer Support: <https://kyoceramobile.com/contactus/support>
or 1-800-349-4478


Using This Product

Connecting the AC adapter (SCP-54ADT) for charging:

- 1 Insert the AC adapter's DC plug into the DC In port on the bottom of the DESKTOP CHARGING CRADLE (ODT301)

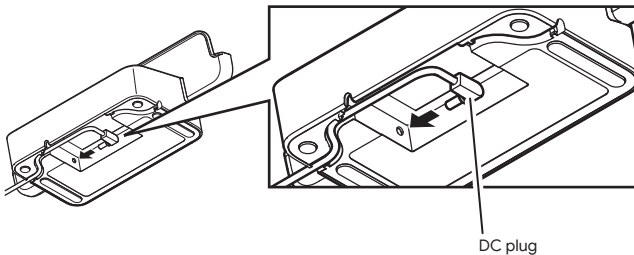


- 2 Plug the AC adapter into an electrical outlet (100V to 240V AC)

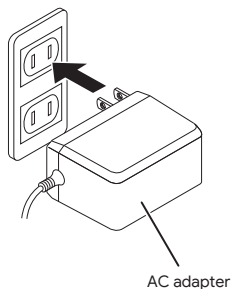

- 3 Slide the tablet downward into the DESKTOP CHARGING CRADLE (ODT301) as shown.

Verify proper orientation, the charging contacts on the tablet must face downward to meet with the contacts in the DESKTOP CHARGING CRADLE (ODT301).

Slide the tablet in straight and all the way down to securely connect. Verify that the charging light on the tablet is lit red. When charging is complete, the charging light will change to green.



- 4 When charging is complete, remove the tablet in the opposite direction.

IMPORTANT: Unplug the AC adapter from the electrical outlet when not in use to reduce the environmental impact of charging.

- NOTE:** If charging does not start, even after a short time, check the following.
- Ensure the DC plug on the AC adapter is connected securely in the DC In port on the bottom of the DESKTOP CHARGING CRADLE (ODT301) as in step 1.
 - Verify the tablet is oriented correctly as in step 3.
 - Plug the AC adapter into a different electrical outlet to ensure it is receiving power.

Specifications

Input :	DC5.4V,1.5A
Output :	DC5.4V,1.5A
Weight :	~ 280 g
Dimensions (H x W x D) :	3.07 x 10.4 x 3.75 in. 78 x 264 x 95.5 mm
Operating temperature :	5°C~35°C
Operating humidity :	35%~85%

- Specifications and appearance may change without notice.
- Illustrations in this guide are for instructional purposes only and may differ from the actual product.